

SPECIFICATIONS

Reference the specification guide below to help you select the correct solution for your needs.

| MODEL NUMBER | 2300W SERIES | 3400W SERIES |
|-------------------------|------------------------|------------------|
| FUEL TYPE | ELECTRIC | ELECTRIC |
| COLOUR | BLACK WHITE | BLACK WHITE |
| HEAT AREA | 65FT | 108FT |
| RATED CURRENT | 230 - 240V/9.6A | 230 - 240V/14.2A |
| MINIMUM FLOOR CLEARANCE | WALL 72" CEILING 96" | |

MOUNTING OPTIONS

| | | |
|------------------------|---|---|
| CEILING MOUNT | ✓ | ✓ |
| WALL MOUNT | ✓ | ✓ |
| RECESSED FLUSH MOUNT | ✓ | ✓ |
| CEILING POLE MOUNT | ✓ | ✓ |
| FREESTANDING | - | - |

CONTROL OPTIONS


| | | |
|-----------------|---|---|
| ON OFF | ✓ | ✓ |
| DIMMER | ✓ | ✓ |
| MASTER REMOTE * | ✓ | ✓ |

* Control up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 30m of heaters.

DIMENSIONS


With a wide range of sizes available, find the ideal heater to suit your outdoor space.

PROFILE

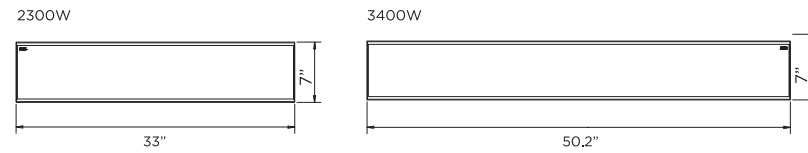


CEILING RECESS


CEILING RECESS FRAME 2300W



CEILING RECESS FRAME 3400W

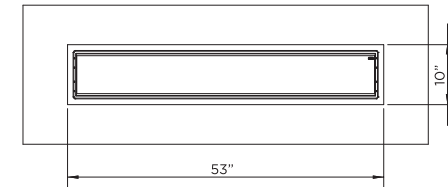

MINIMUM CAVITY OPTION 1



MINIMUM CAVITY OPTION 2

